

PRODUCT SPECIFICATIONS

OMNI CEILING ANTENNA 350-2700MHZ

JRT-SA350/2700-4F

Features and Product Description

Wideband Omni Antenna , coverage 350MHz - 2700MHz .

Typically both used in indoor distribution of GSM/CDMA WIFI/3G/LTE 5G services.

Low return loss,Stable performance.

Compact, light-weight and easy to install.

Supplied with mounting clamp.




Item No.	JRT-SA350/2700-4F			
Frequency Range	MHz	350-520	698-960	1710-2700
Gain	dBi	2.0±1.0	2.2±1.0	4.5±1.0
Polarization		Horizontal		
VSWR		≤2.3	≤2.0	≤1.7
PIM, 3rd Order, 2 x 20 W,	dBc	/	-140	-140
Maximum Power	W	50		
Impedance	Ω	50		

Mechanical Specifications


Dimensions, HxWxD	mm	Φ266×18
Ingression protection		IP67
Weight, without Mounting Kit	kg (lb)	0.4
Radome Material and Color		ABS
Mounting Kit		Ceiling, via hole (standard)
Connector Type and Location		4.3-10 Female
Operational Temperature	°C	-55 to +60
Operational Humidity	%	< 95

Radiation Patterns

Horizontal

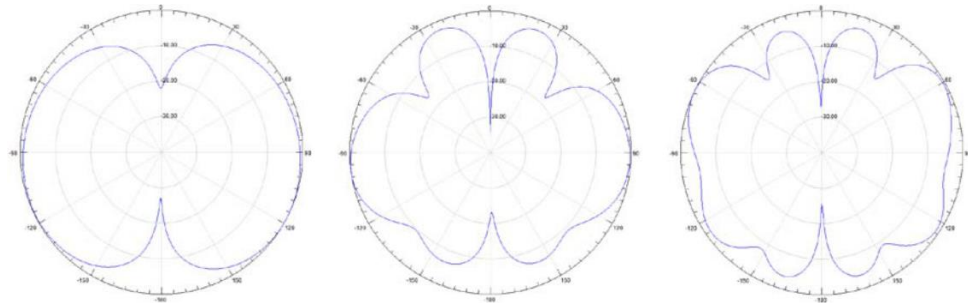

Vertical

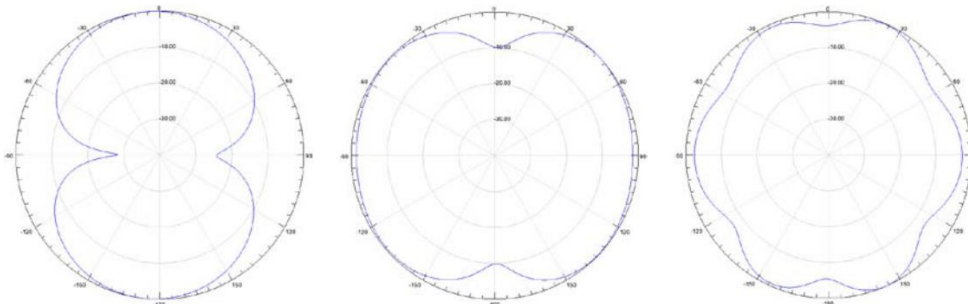

800MH

1710MHz

2500MHz