


PRODUCT SPECIFICATIONS

HYBRID COUPLER 2 IN - 2 OUT 698-4000MHz

MODEL JRT-H-22-0740-43Fi

Features:

- Wide Frequency Range
- High Directivity / Isolation
- High power handling
- Low VSWR
- Low PIM(IM3)
- Low insertion loss

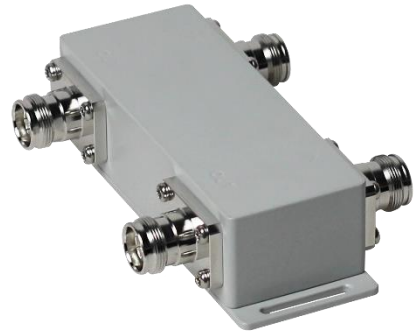

SPECIFICATIONS	
FREQUENCY RANGE	698-4000MHz
INSERTION LOSS	≤3.5dB
VSWR	<1.25
ISOLATION	≥25dB
IMPEDANCE	50Ω
POWER HANDLING	300W / Input port
PIM (IM3)	≤-155dBc@2×+43dBm
CONNECTOR	4.3-10 Female
OPERATING TEMPERATURE	-25 to 60°C
HUMIDITY	0% to 95%
APPLICATION	Indoor or Outdoor, IP65
MATERIAL	Cavity aluminum silver-plated; Connector: Copper
SIZE/DIMENSION	147×44×36mm
WEIGHT	1Kg

Outline Drawing:

